


Current Transformers

Window Diameter: 1.0"
Continuous Thermal Rating: 1.33 at 30 C. amb.;
1.0 at 55 C. amb. Average.

Application: Ammeters and Wattmeters and Relays.
Insulation Class: 0.6 kV. BIL 10kV. full wave 50-400 Hz.
Fully encapsulated.

Standard 5 amp secondary, others available.

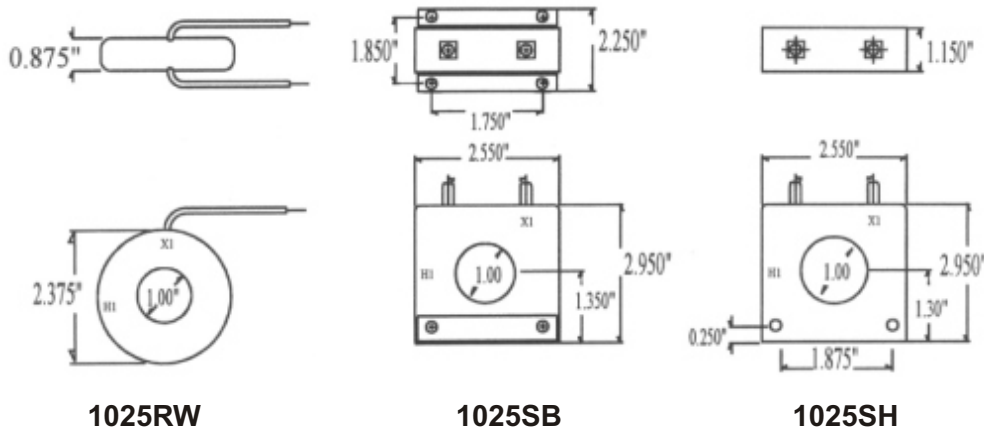

Model nbr.

1025RW
SB
SH

To order, please complete the model number with the appropriate suffix.
eg. 1025RW-100

Catalogue nbr. Suffix	Current Ratio	Accuracy @ 60Hz	Burden VA @ 60Hz
-50	50:5	± 3%	2.0
-60	60:5	± 2%	2.0
-75	75:5	± 2%	2.0
-80	80:5	± 2%	2.0
-100	100:5	± 1%	2.0
-120	120:5	± 1%	2.5
-125	125:5	± 1%	2.5
-150	150:5	± 1%	4.0
-200	200:5	± 1%	4.0
-250	250:5	± 1%	6.0
-300	300:5	± 1%	8.0

- ▶ Flexible leads are UL 3173 125 degree C.
- ▶ CSA approved, # 16 AWG 24" long. Nonstandard length to be specified.
- ▶ Terminals are brass No. 10-32 UNC.
- ▶ Approximate weight 0.5 lb.
- ▶ Additional ratios available.