


Current Transformers

Window Diameter: 2.5"
Continuous Thermal Rating: 1.33 at 30 C. amb.;
1.0 at 55 C. amb. Average.

Application: Ammeters and Wattmeters and Relays.
Insulation Class: 0.6 kV. BIL 10kV. full wave 50-400 Hz.
Fully encapsulated.

Standard 5 amp secondary, others available.

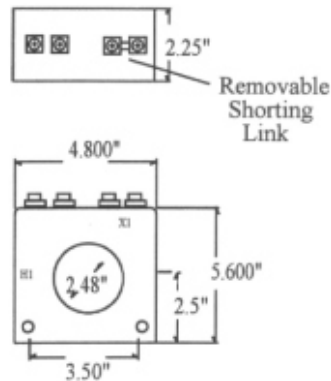

25502SHS

To order, please complete the model number with the appropriate suffix.
eg. 25502SHS-100

- ▶ Includes terminal cover.
- ▶ Terminals are brass No. 10-32 UNC.
- ▶ Optional mounting bracket 2547MBK.
- ▶ Approximate weight 4.5 lb.
- ▶ Additional ratios available.

Model nbr.	Catalogue nbr. Suffix	Current Ratio	VA for $\pm 1\%$ Class	ANSI Metering Class @ 60Hz				
				BO.1	BO.2	BO.5	BO.9	B1.8
25502SHS	-100	100:5	-	1.2	1.2	2.4	4.8	-
	-150	150:5	-	0.6	0.6	1.2	2.4	-
	-200	200:5	-	0.3	0.3	0.3	0.6	1.2
	-250	250:5	-	0.3	0.3	0.3	0.6	1.2
	-300	300:5	-	0.3	0.3	0.3	0.6	1.2
	-400	400:5	C10	0.3	0.3	0.3	0.3	0.6
	-500	500:5	C10	0.3	0.3	0.3	0.3	0.6
	-600	600:5	C10	0.3	0.3	0.3	0.3	0.6
	-750	750:5	C10	0.3	0.3	0.3	0.3	0.6
	-800	800:5	C10	0.3	0.3	0.3	0.3	0.3
	-1000	1000:5	C10	0.3	0.3	0.3	0.3	0.3
	-1200	1200:5	C10	0.3	0.3	0.3	0.3	0.3
	-1500	1500:5	-	0.3	0.3	0.3	0.3	0.3
	-1600	1600:5	-	0.3	0.3	0.3	0.3	0.3
	-2000	2000:5	-	0.3	0.3	0.3	0.3	0.3