


Current Transformers

Window Diameter: 3.0"
Continuous Thermal Rating: 1.33 at 30 C. amb.;
1.0 at 55 C. amb. Average.

Application: Ammeters and Wattmeters and Relays.
Insulation Class: 0.6 kV. BIL 10kV. full wave 50-400 Hz.
Fully encapsulated.

Standard 5 amp secondary, others available.

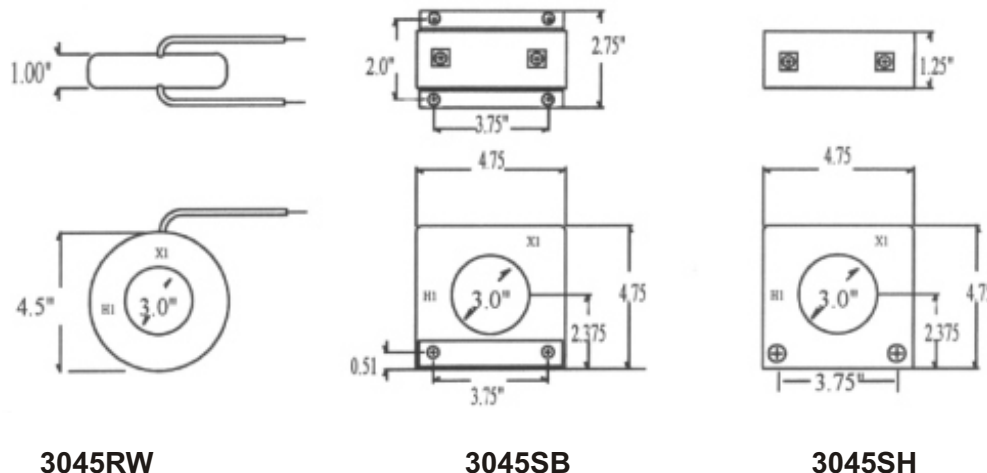

3045RW

3045SB

3045SH

To order, please complete the model number with the appropriate suffix.
eg. 3045RW-100

- ▶ Flexible leads are UL 3173 125 degree C.
- ▶ CSA approved, # 16 AWG 24" long. Nonstandard length to be specified.
- ▶ Terminals are brass No. 10-32 UNC.
- ▶ Approximate weight 1.5 lb.
- ▶ Additional ratios available.

Model nbr.	Catalogue nbr. Suffix	Current Ratio	Accuracy @ 60Hz	Burden VA @ 60Hz
3045RW SB SH	-50	50:5	± 3%	1.0
	-75	75:5	± 2.5%	1.0
	-100	100:5	± 2%	2.0
	-150	150:5	± 1.5%	5.0
	-200	200:5	± 1%	5.0
	-250	250:5	± 1%	5.0
	-300	300:5	± 1%	6.0
	-400	400:5	± 1%	10.0
	-500	500:5	± 1%	10.0
	-600	600:5	± 1%	10.0
	-750	750:5	± 1%	10.0
	-800	800:5	± 1%	10.0
-1000	1000:5	± 1%	10.0	
-1200	1200:5	± 1%	10.0	