


**Current Transformers**

Window Diameter: 3.25"  
Continuous Thermal Rating: 1.33 at 30 C. amb.;  
1.0 at 55 C. amb. Average.

Application: Ammeters and Wattmeters and Relays.  
Insulation Class: 0.6 kV. BIL 10kV. full wave 50-400 Hz.  
Fully encapsulated.

Standard 5 amp secondary, others available.

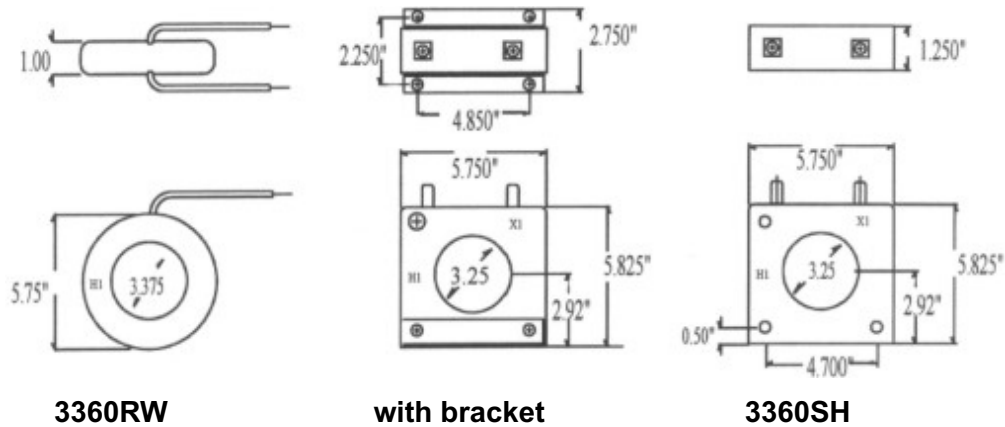

To order, please complete the model number with the appropriate suffix.  
eg. 3360RW-600

- ▶ Flexible leads are UL 3173 125 degree C.
- ▶ CSA approved, # 16 AWG 24" long. Nonstandard length to be specified.
- ▶ Terminals are brass No. 10-32 UNC.
- ▶ Optional mounting bracket 3360MBK.
- ▶ Approximate weight 3.0 lb.
- ▶ Additional ratios available.

Model nbr.	Catalogue nbr. Suffix	Current Ratio	VA for ±1% Class	ANSI Metering Class @ 60Hz				
				BO.1	BO.2	BO.5	BO.9	B1.8
3360RW 3360SH	-300	300:5	15	0.6	0.6	1.2	2.4	-
	-400	400:5	25	0.3	0.6	1.2	1.2	-
	-500	500:5	35	0.3	0.3	0.6	1.2	2.4
	-600	600:5	50	0.3	0.3	0.6	1.2	1.2
	-750	750:5	50	0.3	0.3	0.3	0.6	1.2
	-800	800:5	60	0.3	0.3	0.3	0.6	1.2
	-1000	1000:5	75	0.3	0.3	0.3	0.6	0.6
	-1200	1200:5	75	0.3	0.3	0.3	0.6	0.6
	-1500	1500:5	90	0.3	0.3	0.3	0.6	0.6
	-1600	1600:5	100	0.3	0.3	0.3	0.6	0.6
	-2000	2000:5	100	0.3	0.3	0.3	0.3	0.3
	-2500	2500:5	100	0.3	0.3	0.3	0.3	0.3
	-3000	3000:5	120	0.3	0.3	0.3	0.3	0.3
	-3500	3500:5	120	0.3	0.3	0.3	0.3	0.3
	-4000	4000:5	120	0.3	0.3	0.3	0.3	0.3