





# A Magnetic Sensor For Every Application

Magnetic Sensors offer the highest degree of reliability and are typically used in elevators to position and guide the cab. They easily lend themselves to harsh industrial environments providing far superior sensing distances than inductive proximity switches. For a fraction of the cost. In some applications, one of our sensors can even replace two proximity or limit switches. Contact us with your application, today.



## STANDARD CONTACTS



## BISTABLE or LATCHED CONTACTS

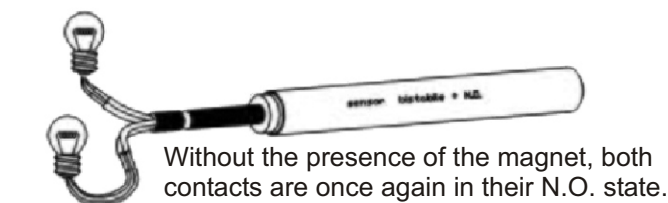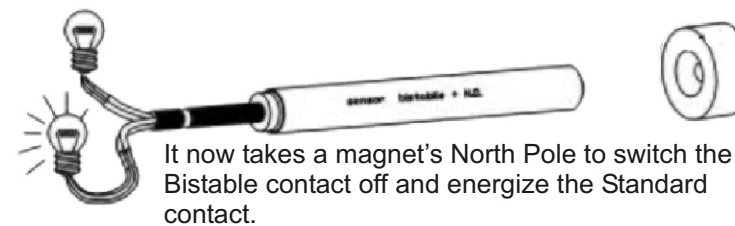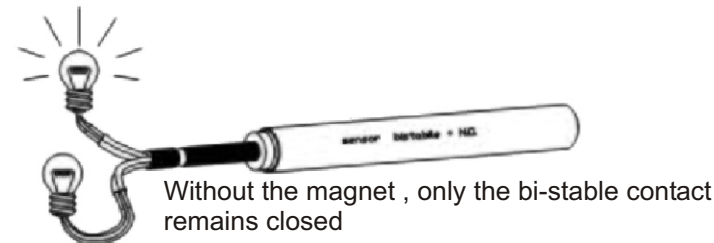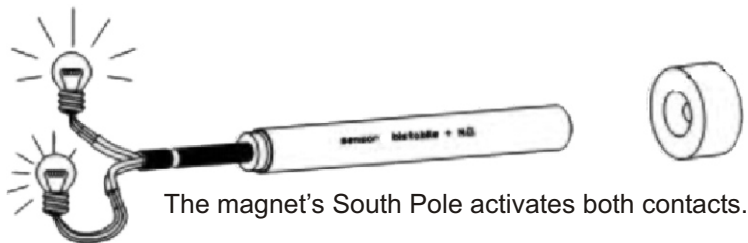

## DIVIDED CONTACTS

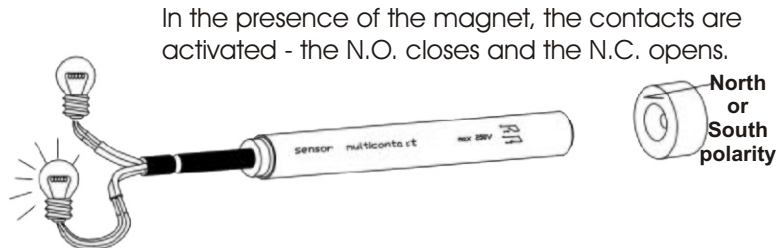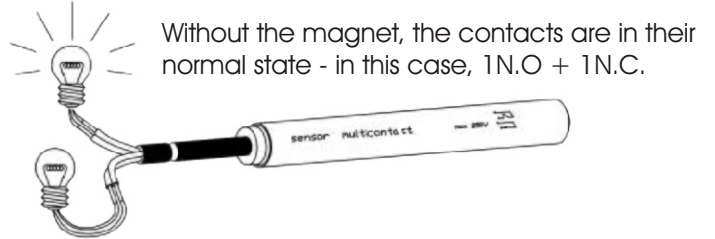


## POLARIZED

When a North Polarized sensor is used, the magnet's North Pole activates the output. The South Pole has no effect. The opposite is true of South Polarized sensors.



## DOUBLE POLARIZATION

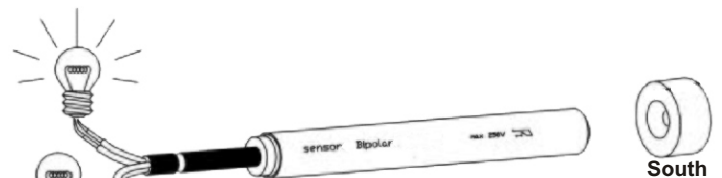

In Double Polarized sensors with two contacts, the first contact is activated in the presence of the magnet's South Pole while the second contact is activated by a magnet's North Pole.

