


Shorting Blocks

Rating: 600 VAC, 40 AMPS

Application: Short circuiting for meter servicing, current transformers, CT taps etc.

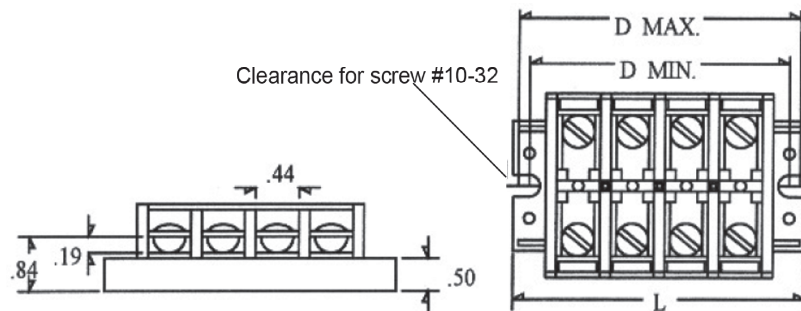

Four and six pole configurations.

Catalogue Number	Number of Poles	Terminal Cover
SB-4T	4	None
SB-6T	6	None
SB-4TC	4	Yes
SB-6TC	6	Yes

- Surface mounting.
- Marking strip provided.
- Brass terminals allow lugs up to ½" wide.

Catalogue Number	Number of Poles	Mounting (inches)		
		L	Min. D	Max.
SB-4T(C)	4	3.25	2.88	3.00
SB-6T(C)	6	4.12	4.12	4.25