


THREE PHASE
Current Transformers

Window Diameter: 2.1"
Continuous Thermal Rating: 1.33 at 30 C. amb.;
1.0 at 55 C. amb. Average.

Application: Ammeters and Wattmeters & Watthourmeters.
Insulation Class: 0.6 kV. BIL 10kV. full wave 50-400 Hz.
Fully encapsulated.

Standard 5 amp secondary, others available.

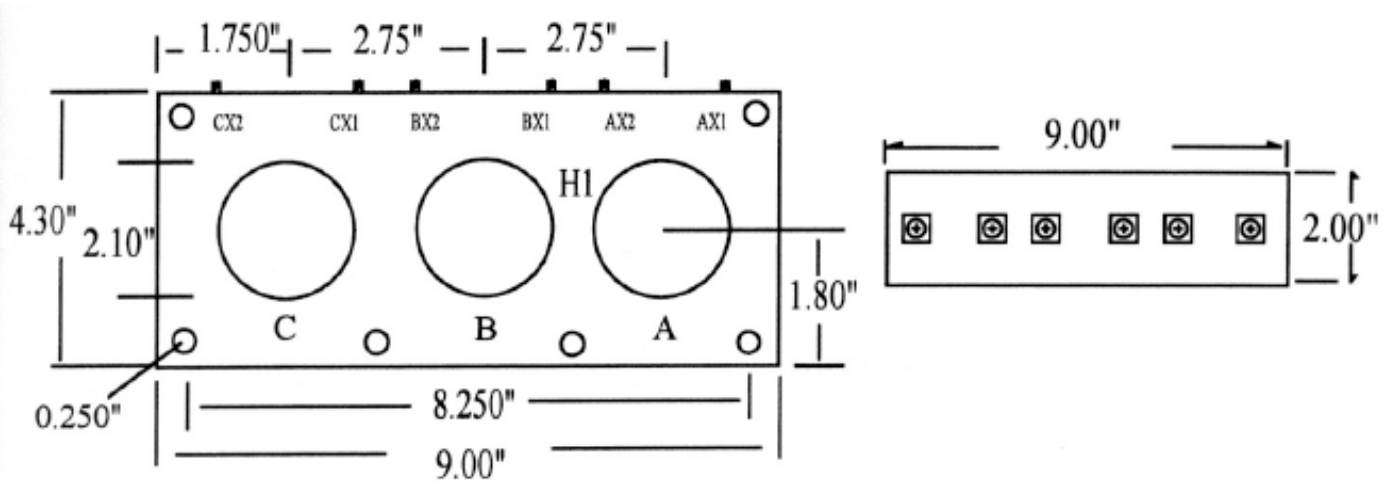

Model nbr.
CT3P2035

Catalogue nbr. Suffix	Current Ratio	VA for ±1% Class	Accuracy @ 60Hz
-100	100:5	1.0	-/+2%
-150	150:5	2.5	-/+1%
-200	200:5	4.0	-/+1%
-250	250:5	6.0	-/+1%
-300	300:5	7.5	-/+1%
-400	400:5	10.0	-/+1%
-500	500:5	12.5	-/+1%
-600	600:5	12.5	-/+1%
-750	750:5	12.5	-/+1%
-800	800:5	12.5	-/+1%
-1000	1000:5	12.5	-/+1%
-1200	1200:5	12.5	-/+1%

To order, please complete the model number with the appropriate suffix.
eg. CT3P2035-100

- ▶ Mounting brackets are optional.
- ▶ Terminals are brass No. 10-32 UNC.
- ▶ Approximate weight 3 lb.
- ▶ Additional ratios available.


Note: 600:5 and greater have an Rf. of 1.0 @ 30C amb.

THREE PHASE
Current Transformers

Window Diameter: 2.1"
Continuous Thermal Rating: 1.33 at 30 C. amb.;
1.0 at 55 C. amb. Average.

Application: Ammeters and Wattmeters & Watthourmeters.
Insulation Class: 0.6 kV. BIL 10kV. full wave 50-400 Hz.
Fully encapsulated.

Standard 5 amp secondary, others available.

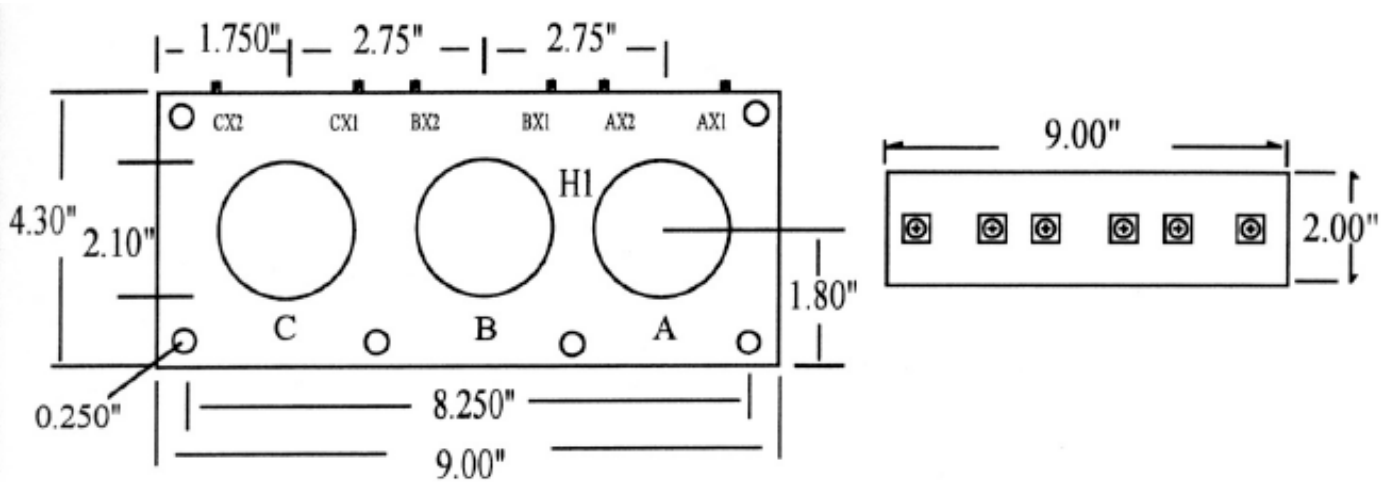

Model nbr.
CT3P2127

To order, please complete the model number with the appropriate suffix.
eg. CT3P2127-100

Catalogue nbr. Suffix	Current Ratio	VA for ±1% Class	ANSI Metering Class @ 60Hz			
			BO.1	BO.2	BO.5	BO.9
-100	100:5	1.0	4.8	-	-	-
-150	150:5	1.0	4.8	-	-	-
-200	200:5	1.5	2.4	4.8	-	-
-250	250:5	2.0	2.4	4.8	-	-
-300	300:5	2.0	2.4	2.4	4.8	-
-400	400:5	4.0	1.2	2.4	2.4	4.8
-500	500:5	5.0	0.6	1.2	2.4	4.8
-600	600:5	10.0	0.6	0.6	1.2	2.4
-750	750:5	12.0	0.6	0.6	1.2	2.4
-800	800:5	15.0	0.6	0.6	1.2	2.4
-1000	1000:5	20.0	0.3	0.3	0.6	1.2
-1200	1200:5	15.0	0.3	0.3	0.6	1.2

- ▶ Mounting brackets are optional.
- ▶ Terminals are brass No. 10-32 UNC.
- ▶ Approximate weight 4.5 lb.
- ▶ Additional ratios available.

Note: 600:5 and greater have an Rf. of 1.0 @ 30C amb.