


Multi Ratio
Current Transformers

Window Diameter: 2.2"
Continuous Thermal Rating: 1.33 at 30 C. amb.;
1.0 at 55 C. amb. Average.

Application: Ammeters and Wattmeters and Relays.
Insulation Class: 0.6 kV. BIL 10kV. full wave 50-400 Hz.
Fully encapsulated.

Standard 5 amp secondary, others available.

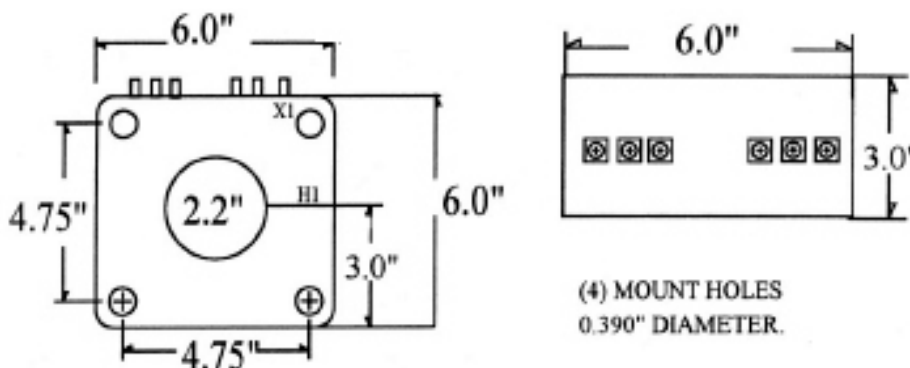

To order, please complete the model number with the appropriate suffix.
eg. ÔV22603T Ü1200

Model nbr. CT22603MR

Catalogue nbr. Suffix	Current Ratio	VA for ±1% Class	ANSI Metering Class @ 60Hz				
			BO.1	BO.2	BO.5	BO.9	B1.8
-500	500:5	C50	0.3	0.3	0.3	0.3	0.3
-600	600:5	C50	0.3	0.3	0.3	0.3	0.3
-1200	1200:5	C100	0.3	0.3	0.3	0.3	0.3
-2000	2000:5	C100	0.3	0.3	0.3	0.3	0.3
-3000	3000:5	C50	0.3	0.3	0.3	0.3	0.3
-4000	4000:5	C50	0.3	0.3	0.3	0.3	0.6

- ▶ Test winding available, taps X5 & X6.
- ▶ Terminals are brass No. 10-32 UNC.
- ▶ Optional mounting bracket 22603MBK.
- ▶ Approximate weight 16 lb.
- ▶ Additional ratios available.

500:5		600:5		1200:5		2000:5		3000:5		4000:5	
Ratios	Tap	Ratios	Tap	Ratios	Tap	Ratios	Tap	Ratios	Tap	Ratios	Tap
50:5	X2-X3	50:5	X2-X3	100:5	X2-X3	300:5	X3-X4	300:5	X3-X4	500:5	X1-X2
100:5	X4-X5	100:5	X1-X2	200:5	X1-X2	400:5	X1-X2	500:5	X4-X5	1000:5	X3-X4
150:5	X1-X2	150:5	X1-X3	300:5	X1-X3	500:5	X4-X5	800:5	X3-X5	1500:5	X2-X3
200:5	X3-X4	200:5	X4-X5	400:5	X4-X5	800:5	X2-X3	1000:5	X1-X2	2000:5	X1-X3
250:5	X2-X4	250:5	X3-X4	500:5	X3-X4	1100:5	X2-X4	1200:5	X2-X3	2500:5	X2-X4
300:5	X3-X5	300:5	X2-X4	600:5	X2-X4	1200:5	X1-X3	1500:5	X2-X4	3000:5	X1-X4
350:5	X2-X5	400:5	X1-X4	800:5	X1-X4	1500:5	X1-X4	2000:5	X2-X5	3500:5	X2-X5
400:5	X1-X4	450:5	X3-X5	900:5	X3-X5	1600:5	X2-X5	2200:5	X1-X3	4000:5	X1-X5
500:5	X1-X5	500:5	X2-X5	1000:5	X2-X5	2000:5	X1-X5	2500:5	X1-X4		
		600:5	X1-X5	1200:5	X1-X5			3000:5	X1-X5		